

AquaSpoiler[®] from Intopool




Fitting instructions

AquaSpoiler is designed to be 6" (15cm) shorter each side of the pool to clear radius corners and so it does not rub against the liner. For example, for a 16' wide pool the AquaSpoiler should be 15' wide.

To shorten AquaSpoiler – use a sharp hacksaw. Cut the two outer sections only and cut equal lengths at the inside ends (opposite to the end bung).



Remember to remove the flotation tubes first as they act as connectors to the centre section. Then shorten the flotation tube by the same amount. Keep the cuts at a straight 90° to the AquaSpoiler. Once the flotation tubes have been cut, it is important to replace the end bungs (2 supplied in parts bag). See diagram below

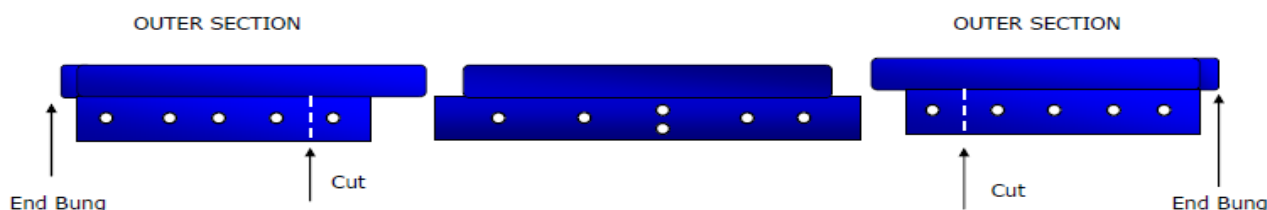

Slide the solar cover between the flat edges of the AquaSpoiler.




Slide AquaSpoiler parts together.



Using a screwdriver, go through the fixing holes to make a hole in the solar cover.



Using SmartClic connectors supplied, firmly fix solar to AquaSpoiler and tighten the SmartClics using a large screwdriver or coin.

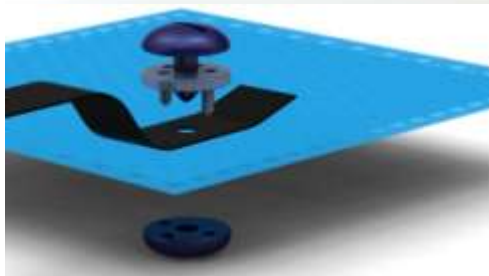

Attach strap with D hook using fixing in centre of AquaSpoiler and then attach the tow rope. This can then be unattached and safely stored away when the cover is on the pool or while being wound onto the reel.